


# KUBOTA K008 SPECIFICATIONS

## SPECIFICATIONS

		*with rubber shoe type	
Machine weight	Rubber crawler	kg	980
Bucket capacity, std. SAE/CECE		m <sup>3</sup>	0.022/0.018
Bucket width	with side teeth	mm	368
	without side teeth	mm	350
Model		D722-BH-5	
Type		Water-cooled, diesel engine E-TWS Economical, ecological type	
Engine	Output ISO90249	PS/rpm	10.2/2050
		kW/rpm	7.4/2050
	Number of cylinders	3	
	Bore × stroke	mm	67 × 68
	Displacement	cc	719
Overall length	mm 2750		
Overall height	mm 2230		
Swivelling speed	rpm	8.3	
Rubber shoe width	mm	180	
Tumbler distance	mm	900	
Dozer size (width × height)	mm	700/860 × 200	
Hydraulic pumps	P1, P2	Gear pump	
	Flow rate	ℓ/min	10.5 + 10.5
	Hydraulic pressure	MPa (kgf/cm <sup>2</sup> )	16.7 (170)
Max. digging force	Arm	kN (kgf)	4.5 (460)
	Bucket	kN (kgf)	9.8 (1000)
Boom swing angle (left/right)	deg	55/60	
Auxiliary circuit	Flow rate	ℓ/min	21.0
	Hydraulic pressure	MPa (kgf/cm <sup>2</sup> )	170
Hydraulic reservoir	ℓ	12.5	
Fuel tank capacity	ℓ	12.0	
Max. travelling speed	km/h	2.0	
Ground contact pressure	kPa (kgf/cm <sup>2</sup> )	24.3 (0.25)	
Ground clearance	mm	150	

## WORKING RANGE

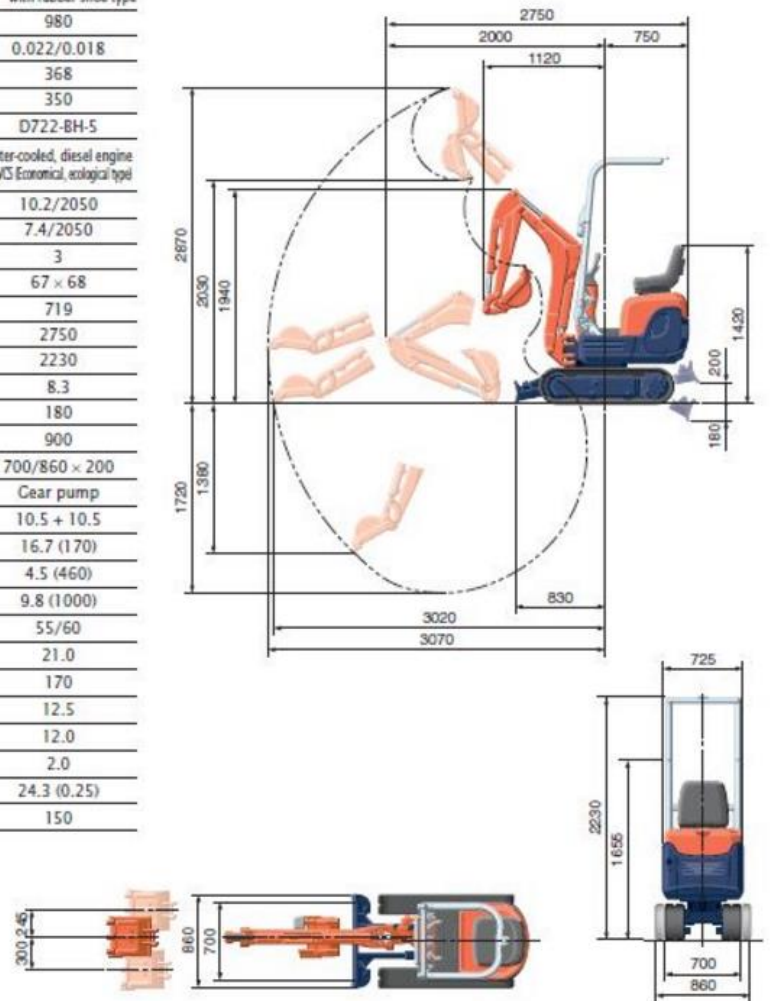

Unit: mm